


PRIMARC 140 | 170

SERVITECH



Included with PRIMARC 140
Welding Kit

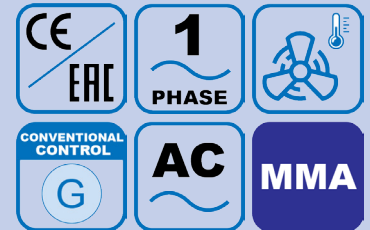

	PRIMARC 140	PRIMARC 170
Input Voltage	(1ph) 230V 50/60Hz	(1ph) 230/400V 50/60Hz
Power 60%	3,2 KVA	4 KVA
U ₀	48 V	48 V
Amp. Min-max	35 ÷ 140 A±10%	35 ÷ 170 A±10%
Ø E	1,6 ÷ 3,25 mm	1,6 ÷ 4 mm
Insulation	H	H
Protec. Degree	IP21S	IP21S
Dimens. (L*W*H)	410x255x315 mm	500x255x350 mm
Box (L*W*H)	485x285x325 mm	550x280x365 mm
Weight box/net	16,6 / 15,8 Kg	19,6 / 18,5 Kg

DESCRIPTION

ENG : Single-phase AC portable welding units. Stepless control of the welding current. Thermostatic overload protection. PRIMARC 140 complete with welding accessories.

FR : Postes à souder portables, monophasés, à courant alternatif. Réglage continu du courant de soudage. Protection thermostatique. PRIMARC 140 complet avec accessoires de soudage.



PRIMARC 140
S110234962

PRIMARC 170
S110234964

Included with 140

- Arc Welding Kit