


SERVICUT 15.1K

SERVITECH



Included
Plasma Torch PT40

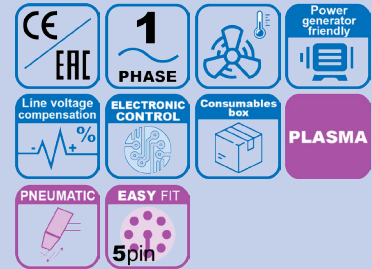

Included Ground Cable

	SERVICUT 15.1 K	
Plasma Torch	PT40 EASY	
Input Voltage	(1ph) 230V 50/60Hz	
Power 60%	3,3 KVA	
Uo	480 V Max	
		AIR
Range	20 ÷ 40 A	20 ÷ 40 A
Cutting current	40% 40 A	40% 40 A
	13 mm	15 mm
	11 25cm/min	13 25cm/min
Air pressure	-	4 - 5,5 bar
Air capacity	-	100 l/min
Insulation	H	
Protec. Degree	IP22S	
Dimens. (L*W*H)	450x235x400 mm	
Box (L*W*H)	565x300x410 mm	
Weight box/net	30,8 / 29,6 Kg	

DESCRIPTION

ENG : The new SERVICUT 15.1K enhances the existing range of plasma cutting machines with built-in compressor. The use of a bicylindrical compressor increases the amount of air yield and greatly reduces the vibrations and noises. SERVICUT 15.1K achieves excellent performances of duty cycle and cutting thicknesses on all conductive materials. Suitable for light and heavy body works, maintenance of large facilities, conditioning plants, shipyards and metalworking in general.

FR : Le nouveau plasma SERVICUT 15.1K enrichit la gamme actuelle de générateurs de coupage au jet de plasma avec compresseur interne. L'utilisation d'un compresseur bi-cylindrique augmente la quantité d'air débité et réduit considérablement les vibrations et le bruit. Le plasma SERVICUT 15.1K a un cycle de travail excellent et de bonnes épaisseurs de coupage dans tous les métaux conducteurs. Il est conseillé pour les travaux de carrosserie, d'entretien, les chantiers navals et il est utile pour les travaux métalliques en général.

Servicut 15.1K
S110235390

Included

- Plasma Torch
- Ground Cable