# SERVIROD 250

SERVITECH

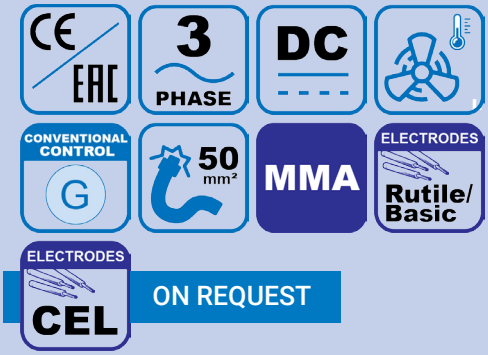


| | SERVIROD 250 |
|---|---|
| Input Voltage | (3ph) 230/400V 50/60Hz |
| Power 60% | 10,8 KVA |
| Uo | 61 ÷ 66 V |
| Amp. Min-max | 35 ÷ 220 A |
| Amp. 60974-1 | 35% 220 A<br>60% 168 A<br>100% 130 A |
| Ø E | 1,6 ÷ 5 mm |
| Insulation | H |
| Protec. Degree | IP23S |
| Dimens. (L*W*H) | 910x500x530 mm |
| Box (L*W*H) | 890x410x505 mm |
| Weight box/net | 70 / 67,5 Kg |

## DESCRIPTION

**ENG :** Three-phase DC welding units, on wheels, with cooling fan, suitable for welding all types of electrodes. Stepless control of the welding current by magnetic shunt.

**FR :** Poste à souder triphasé, à courant continu, sur roues, ventilé. Réglage continu du courant de soudage par shunt magnétique. Soudage de tous les types d'électrodes.

SERVITECH

**SERVIROD 250**
**S110234977**

**On request**
- Cellulosic electrodes