


SERVIROD 450

SERVITECH

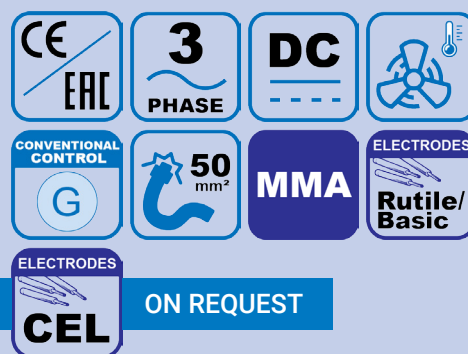

	SERVIROD 450
Input Voltage	(3ph) 230/400V 50/60Hz
Power 60%	23 KVA
Uo	70 ÷ 76 V
Amp. Min-max	55 ÷ 400 A
Amp. 60974-1	35% 400 A 60% 305 A 100% 235 A
Ø E	2 ÷ 6 mm
Insulation	H
Protec. Degree	IP23S
Dimens. (L*W*H)	1000x520x595 mm
Box (L*W*H)	985x410x550 mm
Weight box/net	131,2 / 128,3 Kg

DESCRIPTION

ENG : Three-phase DC welding units, on wheels, with cooling fan, suitable for welding all types of electrodes. Stepless control of the welding current by magnetic shunt.

FR : Poste à souder triphasé, à courant continu, sur roues, ventilé. Réglage continu du courant de soudage par shunt magnétique. Soudage de tous les types d'électrodes.

SERVITECH

SERVIROD 450
S110234974

On request
- Cellulosic electrodes