
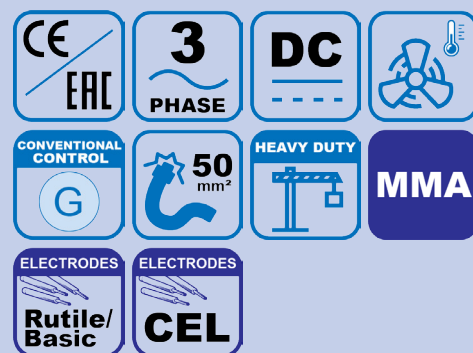


# SERVIROD 500 | 600

## SERVITECH



	SERVIROD 500	SERVIROD 600
Input Voltage	(3ph) 230/400V 50/60Hz	(3ph) 230/400V 50/60Hz
Power 60%	29,5 KVA	35 KVA
Uo	70 ÷ 78 V	71 ÷ 78 V
Amp. Min-max	50 ÷ 420 A	60 ÷ 550 A
Amp. 60/974-1	45% 420 A 60% 375 A 100% 290 A	35% 550 A 60% 420 A 100% 350 A
Ø E	2 ÷ 6 mm	2 ÷ 6 mm
Insulation	H	H
Protec. Degree	IP23S	IP23S
Dimens. (L*W*H)	1120x620x740 mm	1120x620x740 mm
Box (L*W*H)	1150x520x750 mm	1150x520x720 mm
Weight box/net	186 / 179,5 Kg	213 / 200,5 Kg

### DESCRIPTION

**ENG :** Three-phase DC welding units, on wheels, with cooling fan, suitable for welding all types of electrodes for heavy duty work. Stepless control of the welding current by magnetic shunt.

**FR :** Poste à souder triphasé, à courant continu, sur roues, ventilé. Indiqué pour les gros travaux et soudage pour utiliser tous les types d'électrodes. Réglage continu du courant de soudage par shunt magnétique.

**SERVIROD 500**  
**S110234975**

---

**SERVIROD 600**  
**S110234976**