


SERVISTEEL 350 C

SERVITECH

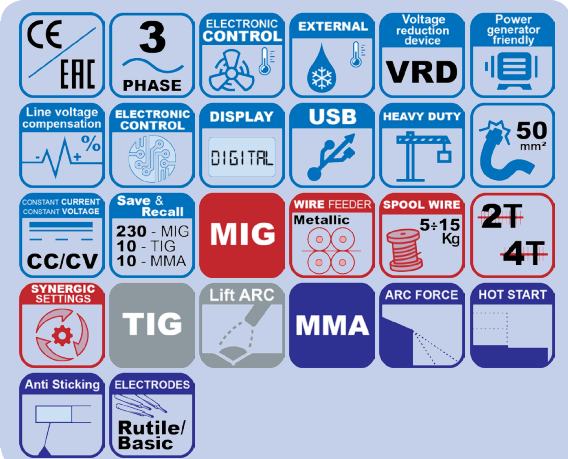

	SERVISTEEL 350C		
Input Voltage	(3ph) 400V 50/60Hz		
Power 60%	12 KVA		
	MMA	TIG	MIG
Uo	75 ÷ 12 V	75 ÷ 12 V	75 ÷ 12 V
Amp. Min-max	10 ÷ 350 A	5 ÷ 350 A	30 ÷ 470 A
Amp. 60974-1	50% 350 A 100% 280 A	50% 350 A 100% 280 A	50% 350 A 100% 280 A
Aluminium	-	-	Ø 0,8 ÷ 1,6 mm
Steel	-	-	Ø 0,6 ÷ 1,6 mm
Flux Core	-	-	Ø 0,6 ÷ 1,6 mm
Stainless Steel	-	-	Ø 0,8 ÷ 1,6 mm
Ø E	Ø 1,6 ÷ 6 mm	-	-
Electrode Type	6013 - 7018 - Cast Iron - CrNi		
Insulation	H		
Protec. Degree	IP23S		
Dimens. (L*W*H)	1010x510x1070 mm		
Box (L*W*H)	Generator 840x390x630 mm Trolley 300x1065x365 mm		
Weight box/net	70,4 / 66,8 Kg		

	SERVISTEEL 350C
Generator	S110235066
Trolley	S110235102
GRE (COOLER)	S110235373

To add on

	SERVISTEEL 350C
SERVIPULS	S110235441
Drive Rolls Ø30. 0,8-1,0	S110234863
Drive Rolls Ø30. 1,0-1,2	S110234847
Drive Rolls Ø30. 1,2-1,6	S110234857
Drive Rolls Ø30. 0,8-1,0 Alum.	S110234864
Drive Rolls Ø30. 1,2-1,6 Alum.	S110234866

Options