
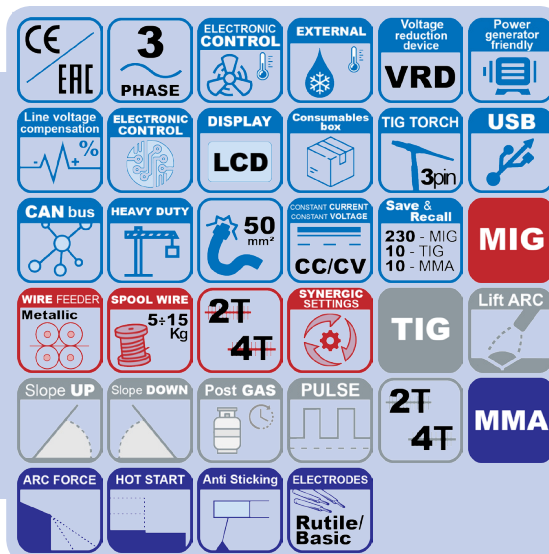


SERVIWAVE 350C

SERVITECH



	SERVIWAVE 350C		
Input Voltage	(3ph) 400V 50/60Hz		
Power 60%	13 KVA		
	MMA	TIG	MIG/MAG
Uo	75 ÷ 12 V	75 ÷ 12 V	75 ÷ 12 V
Amp. Min-max	10 ÷ 350 A	5 ÷ 350 A	30 ÷ 350 A
Amp. 60974-1	60% 350 A 100% 300 A	60% 350 A 100% 300 A	60% 350 A 100% 300 A
Aluminium	-	-	Ø 0,8 ÷ 1,6 mm
Steel	-	-	Ø 0,6 ÷ 1,6 mm
Flux Core	-	-	Ø 0,8 ÷ 1,6 mm
Stainless Steel	-	-	Ø 0,8 ÷ 1,6 mm
Ø E	1,6 ÷ 6 mm	-	-
Electrode Type	6011 - 6013 - 7018		
Insulation	H		
Protec. Degree	IP23S		
Dimens. (L*W*H)	800x491x910 mm		
Box (L*W*H)	800x491x850 mm		
Weight box/net	82,7 / 66,7 Kg		

	SERVIWAVE 350 C
Generator	S110235068
Drive Rolls Ø30. 0,8-1,0	S110234846
Drive Rolls Ø30. 1,2-1,6	S110234847

Optional Upgrade

